



ULP (Ultra-Low-Power)

Wifi accelerometer with built-in data logger



The background of the entire page is a collage of three images. The top image shows a sunset over the Golden Gate Bridge in San Francisco. The bottom-left image shows the Bird's Nest stadium in Beijing at night. The bottom-right image shows the Bird's Nest stadium in Beijing at night, illuminated with red lights. The text "Willow DATASHEET" is overlaid on the top image.

Willow DATASHEET



www.beanair.com

Wireless Accelerometer



MADE
IN
GERMANY

Product Video



User Guide



Quick Start




Mechanical Drawing



STEP File



MQTT Toolkit for IOT Sensors

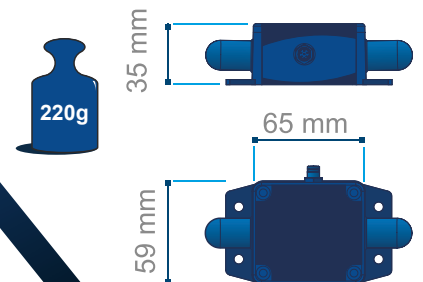

OVERVIEW



- ULP (Ultra Low Power) Wifi technology



- Embedded data logger: up to 5 million data points (with events dating)



- High accuracy Accelerometer (measurement range $\pm 2g$ or $\pm 10g$) FFT and DIN4150-3 (Ground Vibration) modules available



- SSD (Smart Shock Detection) allows to trigger data acquisition on a shock detection



- Rugged aluminum enclosure, Waterproof IP67 | NEMA 6



- USB 2.0 link for device configuration (including firmware upgrade)



- Store & Forward+ : lossless data transmission with hard real-time



- Excellent radio link relying on the radio antenna diversity developed by Beanair®



- IOT Ready : Integrated MQTT data exchange, lightweight and open-source Internet of Things (IOT) protocol

APPLICATIONS



- Dynamic measurement on rolling stock



- Condition Monitoring



- Structural Health Monitoring



- Ground Vibration Monitoring



- Vibration Analysis



AN OPEN-STANDARD & INDUSTRIAL WIFI TECHNOLOGY

- ULP (Ultra Low power) Wifi – IEEE 802.11 b/g/n
- Lower total cost of ownership-works with existing access points
- Large installed base and consequent broad-based familiarity with configuration, use and troubleshooting at the physical and link layers
- Easy provisioning & IT friendly: our ULP wifi sensors use IP-over-Ethernet networking environment

A RELIABLE WIFI TECHNOLOGY THANKS TO OUR “STORE AND FORWARD+” FUNCTION



The store and forward technique works by storing the message transmitted by the **BeanDevice® Wilow** (wireless DAQ/sensor) to a Wifi access point/ Wifi receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique allows to bring a lossless data transmission.

User can also enable the Hard real-time option; i.e. the message must be received by the Wifi Access Point/Wifi Receiver within the confines of a stringent deadline. It is automatically deleted if it failed to reach its destination within the allotted time span

TECHNICAL SPECIFICATIONS

Product reference	
BND-WILOW-AX3D -MR-MO	
MR – Measurement Range:	MO - Mounting option
2: ±2g measurement range	BR - 90° Mounting bracket
10: ±10g measurement range	M - Magnetic Mounting
Example 1: BND-WILOW-AX3D-10G-BR ULP WIFI accelerometer with ±10g range with 90° Mounting bracket	
Example 2: BND-WILOW-AX3D-2G-M ULP WIFI accelerometer with ±2g range with magnet mounting	
Example 3: BND-WILOW-AX3D-10G ULP WIFI accelerometer with ±10g range	

Accelerometer specifications	
Accelerometer technology	High precision accelerometer based on MEMS technology
Accelerometer measurement range	two versions: ±2g and ±10g
Sensitivity	±2g Version : 660 mV/g ±10g version: 200 mV/g
Typical non-linearity	±0.1% FS
Analog to Digital converter	24-bit delta-sigma with temperature compensation Synchronous measurement channel
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	2 kSPS per axis
Noise spectral density	±2g Version : 45 µg/√Hz ±10g version: 100 µg/√Hz
Zero-g Offset Variation from RT over Temp	±2g Version : ±0.2 mg/°C ±10g version: ±0.1 mg/°C



TECHNICAL SPECIFICATIONS

Accelerometer specifications

Sensitivity Variation from RT over Temp	$\pm 2g$ Version : $\pm 0.01\%$ / $^{\circ}C$ (XY) , $\pm 0.02\%$ / $^{\circ}C$ (Z) $\pm 10g$ version: $\pm 0.01\%$ / $^{\circ}C$
Offset Ratiometric Error	$\pm 2g$ Version : 4mg $\pm 10g$ version: $\pm 0.2\%$ (XY) , $\pm 0.1\%$ (Z)
Sensitivity Ratiometric Error	$\pm 2g$ Version : $\pm 1.25\%$ (X-Y) , $\pm 0.2\%$ (Z) $\pm 10g$ Version : $\pm 1.6\%$ (X-Y) , $\pm 0.2\%$ (Z)
Cross Axis Sensitivity	0,02
Onboard temperature sensor	Range $-40^{\circ}C$ to $+65^{\circ}C$, accuracy $\pm 1^{\circ}C$

Shock sensor specifications

Shock Sensor technology	MEMS technology
Shock sensor range	$\pm 2g/\pm 4g/\pm 6g/\pm 8g/\pm 16g$ dynamically selectable from the BeanScape software
Sensitivity	$\pm 2g$ range: 0.06 mg/digit
	$\pm 4g$ range: 0.12 mg/digit
	$\pm 6g$ range: 0.06 mg/digit
	$\pm 8g$ range: 0.12 mg/digit
	$\pm 16g$ range: 0.12 mg/digit
Typical non-linearity	$\pm 0.15\%$ on the FS
Analog to Digital converter	12-bits with temperature compensation
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	1.6 kSPS per axis
Noise spectral density	150 $\mu g/\sqrt{Hz}$

TECHNICAL SPECIFICATIONS

Shock sensor specifications

Sensitivity change Vs temperature	$\pm 0,01\%$ /°C
Zero-g level change vs temperature (max delta from 25°C)	± 0.5 mg/°C
Typical zero-g level offset accuracy	± 40 mg
Anti-aliasing filter	Butterworth 2th order filter

Remote configuration parameters

Data Acquisition mode (SPS = sample per second)	Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour
	Alarm -Low duty cycle: 1s to 24 hour
	Streaming mode : 100 SPS by default
	Streaming with event-trigger (SET) Mode : 100 SPS by default
Sampling Rate (in streaming mode)	Minimum: 1 SPS
	Maximum: 3 kSPS per axis
Alarm Threshold	High and Low Levels alarms
Power Mode	Sleep & Active power modes

RF Specifications

Wireless Protocol Stack	IEEE 802.11 b/g/n
WSN Topology	Point-to-Point / Star / Cluster-Tree
Crypto Engine	WPA2, WPS2
Data rate	UDP: 16 Mbps TCP: 13 Mbps

TECHNICAL SPECIFICATIONS

RF Specifications

RF Characteristics	ISM 2.4GHz. Antenna diversity designed by Beanair®
TX Power	18 dBm @ 1 DSSS
	14.5 dBm @ 54 OFDM
Rx Sensitivity	-95.7 dBm @1 DSSS
	-74.0 dBm @54 OFDM
Maximum Radio Range	200m (L.O.S), Radio range be extended by adding Wifi Bridge/Repeater
Antenna	Antenna diversity : 2 omnidirectional antenna with a gain of 2,8 dBi

USB specifications

USB standard	USB 2.0
Data Rate	Full speed operation(12MB/s)
Related functions	<ul style="list-style-type: none">- Firmware update- Wifi & system configuration"

Embedded Data logger

Storage capacity	up to 5 million data points
Wireless data downloading	3 minutes to download the full memory (average time)

TECHNICAL SPECIFICATIONS

Environmental and Mechanical

Casing

Aluminum casing
Dimensions in mm (LxWxH):35x59x65 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 220g

IP | NEMA Rating

Ip67 | Nema 6

Shock resistance

100g during 50 ms

Operating Temperature

-40 °C to +65 °C

Norms & Radio Certifications

CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 (Europe)

FCC (North America)

ARIB STD-T66 Ver. 3.6 (Japan)

ROHS - Directive 2002/95/EC

Power supply

Rechargeable battery

High density Lithium-Ion rechargeable battery with a capacity of 780 mAh

Integrated battery charger

Integrated Lithium-ion battery charger with high precision battery monitoring

Current consumption @ 3,3V

During data acquisition : 20 to 30 mA

During Radio transmission :

- 1 DSSS - 278 mA

- 54 OFDM - 229 mA

During sleep power mode : < 100 µA

Power supply

External power supply

Two power supplies available:


- USB Power supply 5V

- 5VDC to 17VDC compatible with solar energy harvesting

TECHNICAL SPECIFICATIONS

Included accessories	
M8 plastic cap	1pcs, Ref: WL-PC
M8 to USB cable	1pcs M8-5pins to USB Cable, 2 meters length. Ref:WL-CBL-M8-USB-2M
Magnet for power on/power off	1pcs Magnet. Ref: WL-MGN
Wall mounting kit	4 pcs M5 screws+ Locknut. Ref:WL-SCMKIT
Options (not included)	
Power-supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with USB plug
M8 Cable	M8-5Pins Cable , cable length : - 2 meters. Ref: WL-CBL-M8-2M - 5 meters.Ref: WL-CBL-M8-5M
WIFI AP/Repeater (wifi link extension)	Wireless AP/Repeater with an integrated N-Type RF connector + High Gain Antenna Casing : Polycarbonate Waterproof casing Dimensions: 190 x 46 mm Weight: 196 g Antenna Connector: N-Type Connector (male) Power Supply: 24V, 0.5A PoE Adapter (included) Power Method: Passive Power over Ethernet Max. Power Consumption: 6 Watts Operating Temperature: -40 to 80° C Shock and Vibration: ETSI300-019-1.4 Ref: WL-AP-UBIQ-TIT-7DBI for 7dBi Antenna Ref: WL-AP-UBIQ-TIT-9DBI for 9dBi Antenna
Solar Panel	Polycrystalline Solar Panel for BeanDevice® Willow® power supply Maximum Power : 3W Optimum operating Voltage: 12 VDC Dimension: 235 mm x 135 mm x 17mm Protection Frame: Aluminum Frame , Waterproof IP67 Length : 2 meters (Ref: WL-SLP-3W-2M) or 5 meters (Ref: WL-SLP-3W-5M) with M8 plug for a direct to connection to the BeanDevice® Willow® Country of origin: solar panel from China, assembled and tested in Germany
Calibration certificate	Calibration certificate linked to national and international standards (DRAKKS) (Ref: WL-CERT-CAL)

Beandevicel® Willow® Front View

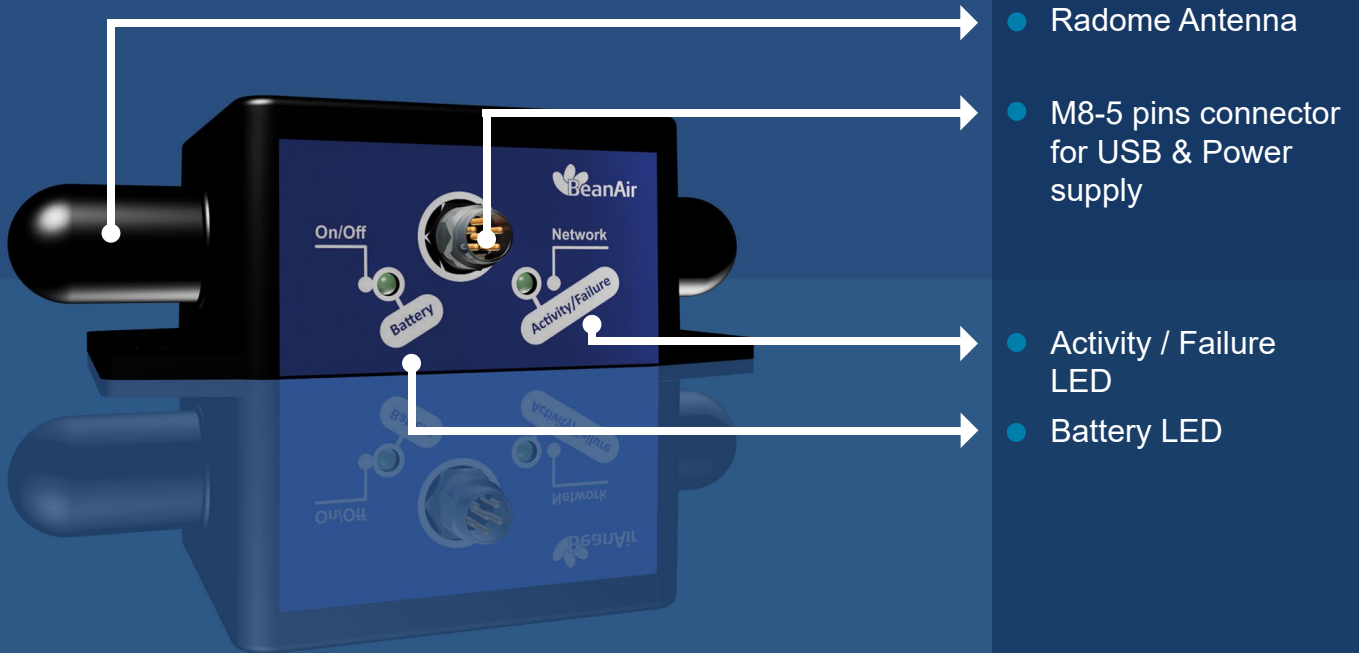

Mechanical Mounting Options

By default, the **BeanDevice® Willow®** comes with a screw mounting lid.

Two other mounting options are available:

- Magnetic mounting , add the extension –M on your product reference
- 90° bracket, add the extension –BR on your product reference

Mechanical Mounting Options Video



Wireless Accelerometer



CONTACT US

Headquarter:

BeanAir GmbH
Wolfener Straße 32 - 34
12681 Berlin

Email:

info@beanair.com

Phone number:

+49 30 98366680

Visit our Websites

www.beanair.com

www.space-wireless.com

