

LoRaWAN X-INC

Combo Sensors (Vibration, Inclinomater, Shock)

$\pm 15^\circ / \pm 30^\circ$, $\pm 2g$ / $\pm 10g$



 **DATASHEET**



www.beanair.com

Combo Sensors



MADE
IN
GERMANY

Product Video



User Guide



Quick Start




Mechanical Drawing



STEP File



MQTT Toolkit for IOT Sensors

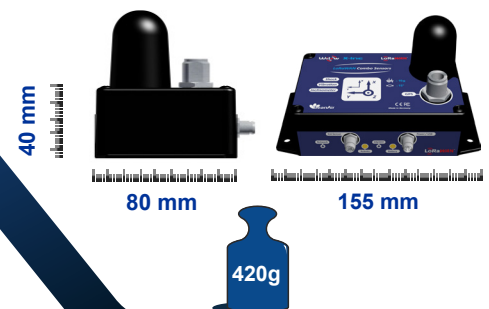

APPLICATIONS

- Structural Health Monitoring



BeanAir Rethinking Sensing Technology

www.beanair.com

Main Features



ULP (Ultra Low Power)
LoRaWAN (up to 15km of wireless range)



Smart and flexible power supply,
compatible with USB and Solar power sources.



Rugged aluminum enclosure:
Waterproof IP67 | NEMA 6



Embedded data logger (10 millions Logs)



SSD (Smart Shock Detection)
allows to trigger data acquisition on a shock detection



USB 2.0 for device configuration
(including firmware update)



Industrial temperature range
-40 °C to +65 °C



Built-in smart sensors :
Inclination, vibration and shock/impact



IIOT Ready: integrates MQTT data exchange, an open-source Internet of Things (IIOT) protocol




Store and Forward+:
Lossless data transmission with hard real-time



Options for connecting external sensors :
-Temperature and Humidity sensor,
-Accurate Temperature sensor



Accurate Time-stamping (± 100 ns) thanks to GPS option

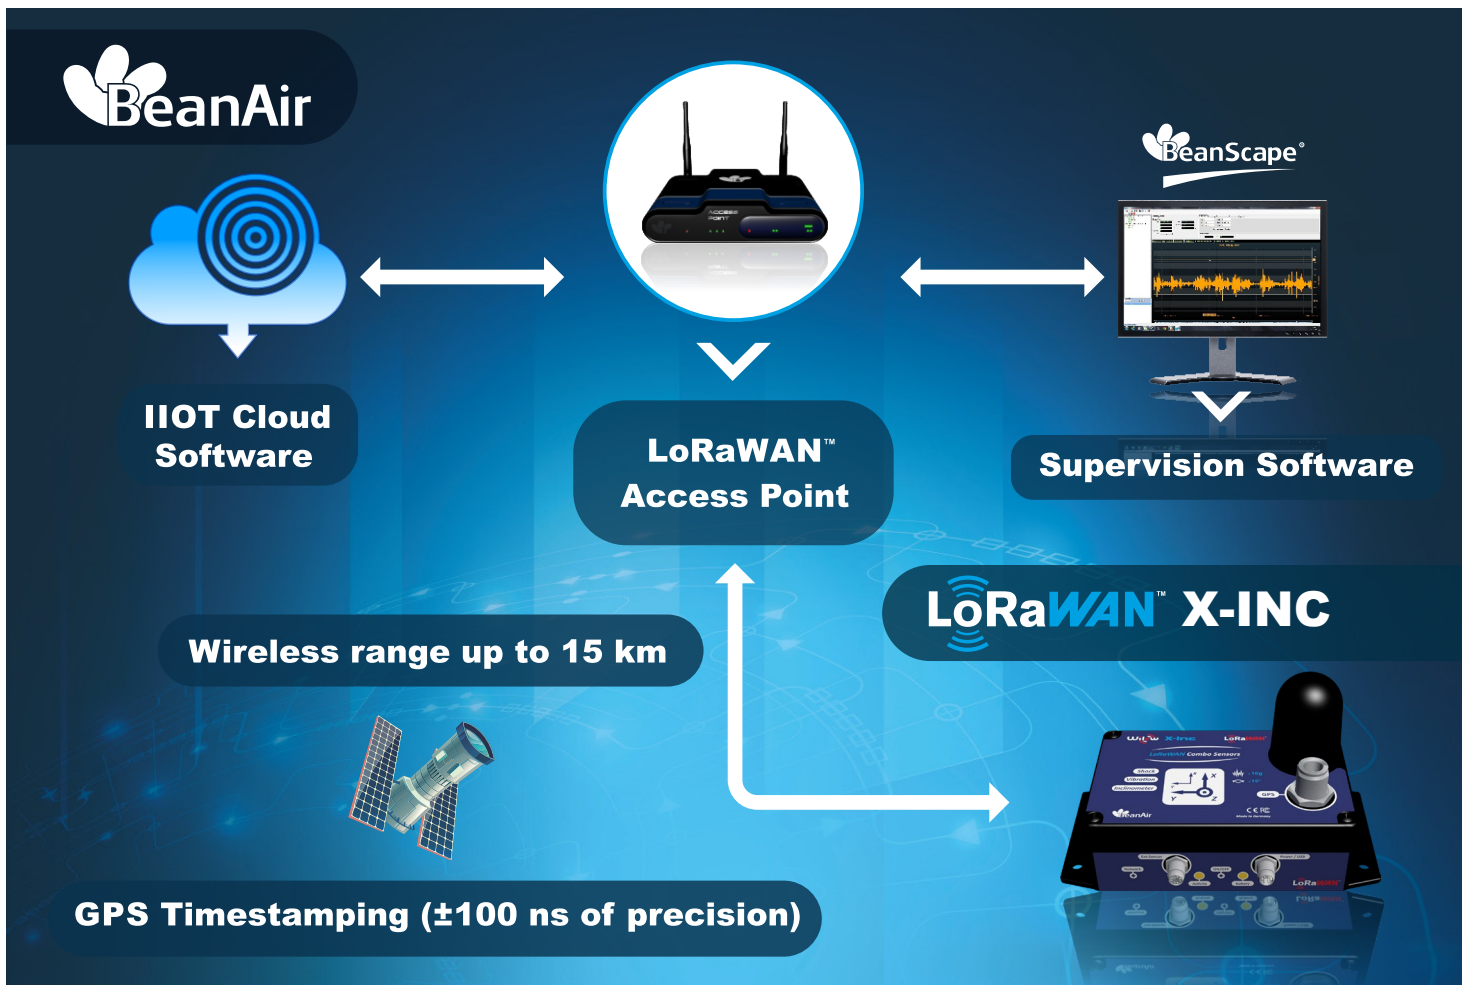

Open-standard, Ultra-Low Power and reliable « Internet of Things » sensors

Our innovative and open-standard **Wilow®** series is now extended with **LoRaWAN**, an ultra long-range (15km) and very low-power wireless technology, and integrates the latest smart sensor technologies (**vibration, inclination, shock**) .

LoRaWAN wireless protocol is more suitable for static monitoring (slow measurement heart-beat) but can reach a long distance (15 km in Line of Sight, 1.6km in urban areas) without using a repeater.

A RELIABLE LoRaWAN TECHNOLOGY THANKS TO OUR " **STORE AND FORWARD+** " FUNCTION



The store and forward technique works by storing the message transmitted by **the BeanDevice® Wilow LoRaWAN** (wireless DAQ/sensor) to a LoRaWAN access point receiver. If the message is not received due to a network disruption, it will be retransmitted on the next transmission cycle. This technique allows to bring a lossless data transmission.

User can also enable the Hard real-time option; i.e. the message must be received by the LoRaWAN Access Point Receiver within the confines of a stringent deadline. It is automatically deleted if it failed to reach its destination within the allotted time span

Product reference

BND-WILOW-LORA-AX3D -MR-CY

MR – Measurement Range:

2G: ±2g measurement range

10G: ±10g measurement range

CY - Country

US - USA, Canada, Australia

CN- CHINA

EU- Europe

Example 1: BND-WILOW-LORA-AX3D-10G-CN

LoRaWan accelerometer with ±10g range for China

Example 2: BND-WILOW-LORA-AX3D-2G-US

LoRaWan accelerometer with ±2g range for USA/Canada/Australia

Example 3: BND-WILOW-AX3D-LORA-10G-EU

LoRaWan accelerometer with ±10g range for Europe

	Main accelerometer specifications
Accelerometer technology	High precision accelerometer based on MEMS technology
Measurement range	Two versions: ±2g and ±10g
Sensitivity	±2g Version : 660 mV/g ±10g version: 200 mV/g
Typical non-linearity	±0.1% FS
Analog to Digital converter	24-bit delta-sigma with temperature compensation Synhchronuous measurement channel
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	2 kSPS per axis
Noise spectral density	±2g Version : 45 µg/√Hz ±10g version: 100 µg/√Hz
Zero-g Offset Variation from RT over Temp	±2g Version : ±0.2 mg/°C ±10g version: ±0.1 mg/°C
Sensitivity Variation from RT over Temp	±2g Version : ±0.01 %/°C (XY) , ±0.02 %/°C (Z) ±10g version: ±0.01 %/°C
Offset Ratiometric Error	±2g Version : 4mg ±10g version: ±0.2% (XY) , ±0.1% (Z)
Sensitivity Ratiometric Error	±2g Version : ±1.25 % (X-Y) , ±0.2 % (Z) ±10g Version : ±1.6% (X-Y) , ±0.2 % (Z)
Cross Axis Sensitivity	0,02
Onboard temperature sensor	Range -40°C to +65°C , accuracy ±1°C

	Shock sensor specifications (for Smart Shock Detection function)
Shock Sensor technology	MEMS technology
Shock sensor range	$\pm 2g/\pm 4g/\pm 6g/\pm 8g/\pm 16g$ dynamically selectable from the BeanScope software
Sensitivity	$\pm 2g$ range: 0.06 mg/digit $\pm 4g$ range: 0.12 mg/digit $\pm 6g$ range: 0.06 mg/digit $\pm 8g$ range: 0.12 mg/digit $\pm 16g$ range: 0.12 mg/digit
Typical non-linearity	$\pm 0.15\%$ on the FS
Analog to Digital converter	12-bits with temperature compensation
Sensor frequency response (-3 dB)	DC to 800 Hz
Maximum sampling rate	1.6 kSPS per axis
Noise spectral density	150 $\mu g/\sqrt{Hz}$
Sensitivity change Vs temperature	$\pm 0.01\%/^{\circ}C$
Zero-g level change vs temperature (max delta from 25°C)	± 0.5 mg/ $^{\circ}C$
Typical zero-g level offset accuracy	± 40 mg
Anti-aliasing filter	Butterworth 2th order filter

	Inclinometer sensor specifications
Inclinometer Technology	Inclinometer based on MEMS Technology
Measurement resolution (Band-width 10 Hz)	0.001°
Noise density	0.0004 °/√Hz
Accuracy (Full scale)	±0.05° (±0.02° on customer request)
Offset temperature dependency (temperature range -25°C to +85°C)	±0.002 °/°C
Sensitivity temperature dependency (temperature range -25°C to +85°C)	±0.005 %/°C with temperature compensation
	±0.013 %/°C without temperature compensation
Long term stability (@23°C)	< 0.004 °
Analog to Digital converter	24-bit delta-sigma analog-to-digital with temperature compensation Synchronous measurement channel
Sensor frequency Response (-3dB)	DC to 28 Hz

	Remote configuration parameters
Data Acquisition mode (SPS = sample per second)	Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour Alarm -Low duty cycle: 1s to 24 hour Streaming mode : 100 SPS by default Streaming with event-trigger (SET) Mode : 100 SPS by default
Sampling Rate (in streaming mode)	Minimum: 1 SPS Maximum: 3 kSPS per axis
Alarm Threshold	High and Low Levels alarms
Power Mode	Sleep & Active power modes

Combo Sensors



	RF Specifications
Wireless Protocol Stack	Lorawan
WSN Topology	Point-to-Point / Star
Crypto Engine	WPA2, WPS2
Data rate	up to 62.5 kbps LoRA
RF Characteristics	868 MHz for Europe 915 MHz for USA, Canada and Australia 490 MHz and 780 MHz for China
TX Power	+22dBm maximum
Rx Sensitivity	Down to -148 dBm

	USB specifications
USB standard	USB 2.0
Data Rate	Full speed operation (12MB/s)
Related functions	. Firmware update . Wifi & system configuration

	Environmental and Mechanical
Casing	Aluminum casing Dimensions in mm (LxWxH): 155x80x40 mm without antenna & eyelet, Weight (with internal battery, w/o mounting option) : 420g
IP NEMA Rating	IP67 Nema 6
Shock resistance	100g during 50 ms
Operating Temperature	-40 °C to +65 °C
Norms & Radio Certifications	. CE Labelling Directive R&TTE (Radio) ETSI EN 300 328 (Europe) . FCC (North America) . ROHS - Directive 2002/95/EC

	Embedded Data logger
Storage capacity	up to 5 million data points
Wireless data downloading	20 minutes to download the full memory (average time)

	Power supply
Rechargeable battery	High density Lithium-Ion rechargeable battery with a capacity of 6500 mAh
Integrated battery charger	Integrated Lithium-ion battery charger with high precision battery monitoring
Current consumption @ 3,3V	<ul style="list-style-type: none">· During data acquisition : 20 to 30 mA· During Radio transmission : 118 mA at 868 MHz/915 MHz 107 mA at 490 MHz· During sleep power mode : < 100 μA
External power supply	Two power supplies available: <ul style="list-style-type: none">· USB Power supply 5V· 2.5VDC to 17VDC compatible with solar energy harvesting

	Included accessories
M8 plastic cap	1pcs, Ref: WL-PC
M8 to USB cable	1pcs M8-6pins to USB Cable, 2 meters length. Ref:WL-CBL-M8-USB-2M
Magnet for power on/power off	1pcs Magnet. Ref: WL-MGN
Wall mounting kit	4 pcs M5 screws+ Locknut. Ref:WL-SCMKIT




Combo Sensors



	Options (not included)
Power-supply	Wall plug-in, Switchmode power Supply 12V @ 1,25A with USB plug Ref: WL-USB-5V-PWR
M8 Cable	M8-5Pins Cable , cable length : - 2 meters. Ref: WL-CBL-M8-6P-2M - 5 meters. Ref: WL-CBL-M8-6P-5M
Solar Panel	Polycrystalline Solar Panel for BeanDevice® Wilow® power supply Maximum Power : 3W Optimum operating Voltage: 12 VDC Dimension: 235 mm x 135 mm x 17mm Protection Frame: Aluminum Frame , Waterproof IP67 Length : 2 meters (Ref: WL-SLP-3W-6P-2M) or 5 meters (Ref: WL-SLP-3W-6P-5M) with M8 plug for a direct to connection to the BeanDevice® Wilow® Country of origin: solar panel from China, assembled and tested in Germany
Calibration certificate	Calibration certificate provided by Beanair GmbH A static calibration method is used on a granite surface plate DIN876 (Ref: WL-CERT-CAL)

Back Side

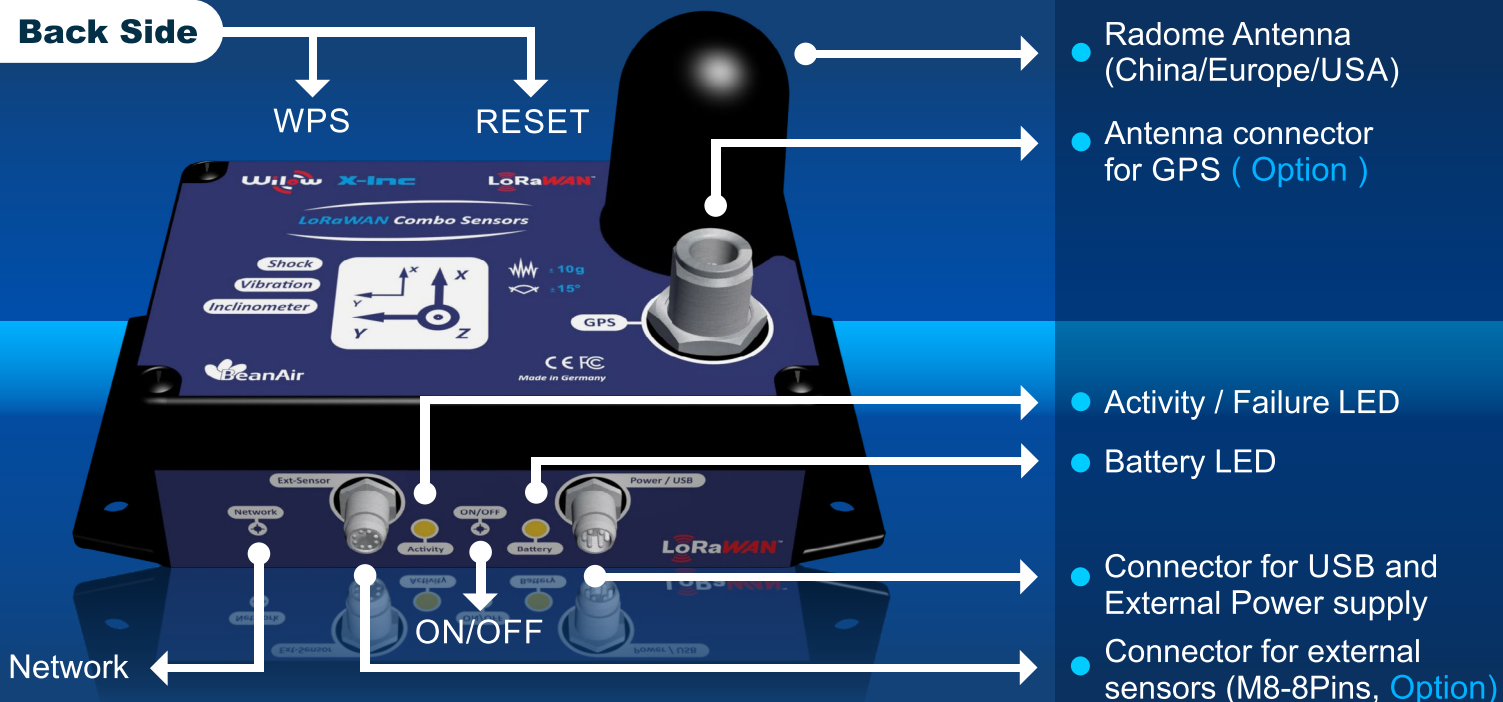

CONTACT US

Headquarter:

BeanAir GmbH
Wolfener Straße 32 - 34
12681 Berlin

Email:

info@beanair.com

Phone number:

+49 30 98366680

Visit our Websites

www.beanair.com

www.space-wireless.com

