Specification Sheet SS-LG-0210 February 2010

The CHATILLON® LG Series mechanical force gauge is ideal for a wide range of force testing applications. Based on our popular DPP Series force gauge, the LG Series features a larger, 2.25-inch dial for improved resolution and readability, peak hold button, ergonomic shape and improved accuracy of ±0.5% of full scale. The LG gauge is an excellent, economical solution for tensile or compression testing.

The durable, plastic housing fits naturally in the hand for a comfortable and firm grip even at maximum loads. Gauges may be mounted to a test stand for even greater control and consistent results in repetitive testing applications. Easy to read concentric dial measures clockwise only. Dial rotates 360-degrees for taring. A peak hold button captures peak readings and can be easily and quickly returned to zero. A mechanical overload feature protects the gauge from damage. Available in lbf, kgf or N units of measure. LG Series gauges come complete with protective carrying case and a set of stainless steel attachments. A Certificate of Calibration with Data is supplied standard.

Features

- Three Graduation Styles
 - LBF
 - KGF
 - Newtons
- Tensile (Pull) and Compression (Push) Testing
- Peak Load Switch
- Tare Ring
- Intrinsically Safe
- NIST Calibration with Data
- 2 Year Warranty

Specifications

Accuracy: ±0.5% of Full Scale
Overload Capacity: 110% of Rated Capacity
Maximum Overload: 150% of Rated Capacity
Tare Capacity: 10% of Rated Capacity
Dial Resolution: 0.5% of Full Scale
Deflection (Full Scale): 10mm (.394 inches)
Operating Temperature: 40°F to 110°F

5°C to 45°C

Instrument Weight: 1.5 lbs (0.68 kg)
Shipping Weight: 8.4 lbs (3.80 kg)









Ordering

Dial Style - LBF

Model	Capacity	
LG-002	2 x 0.01 lbf	
LG-005	5 x 0.025 lbf	
LG-080	80 x 4 ozf	
LG-010	10 x 0.05 lbf	
LG-020	20 x 0.1 lbf	
LG-030	30 x 0.15 lbf	
LG-050	50 x 0.25 lbf	
LG-075	75 x 0.375 lbf	
LG-100	100 x 0.5 lbf	

Dial Style - KGF

Model	Capacity	
LG-1KG	1 x 0.005 kgf	
LG-2KG	2 x 0.01 kgf	
LG-3KG	3 x 0.015 kgf	
LG-5KG	5 x 0.025 kgf	
LG-10KG	10 x 0.05 kgf	
LG-20KG	20 x 0.1 kgf	
LG-30KG	30 x 0.15 kgf	
LG-50KG	50 x 0.25 kgf	

Dial Style - N


Model	Capacity	
LG-10N	10 x 0.05 N	
LG-20N	20 x 0.1 N	
LG-30N	30 x 0.15 N	
LG-50N	50 x 0.25 N	
LG-100N	100 x 0.5 N	
LG-200N	200 x 1 N	
LG-300N	300 x 1.5 N	
LG-500N	500 x 2.5 N	<u> </u>


Standard Accessories

Description
Hook, Low Capacity
Hook, Medium Capacity
Chisel Point Adapter
Point Adapter
Notch Adapter
Flat Adapter
Extension Rod
Carrying Case

Optional Accessories

Part No.	Description
SPK-FMG-HANDI F	Handle Assembly

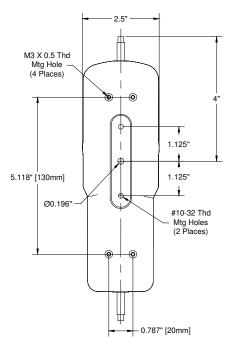

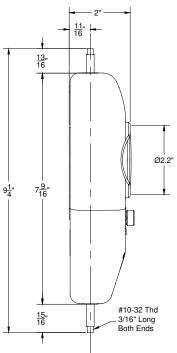

E96-328 LG GAUGE SERIES

AMETEK

MEASUREMENT & CALIBRATION TECHNOLOGIES

For the authorized Chatillon Distributor or Manufacturer's Representative near you, go to www.chatillon.com

AMETEK Measurement & Calibration

Technologies 8600 Somerset Drive Largo, Florida 33773 United States of America

+1-727-536-7831 +1-800-527-9999 Tel +1-727-539-6882

Email chatillon.fl-lar@ametek.com

United Kingdom

Lloyd Instruments Ltd. Steyning Way Bognor Regis West Sussex PO22 9ST United Kingdom Tel +44 (0) 1243 833 370 Fax +44 (0) 1243 833 401

Email uk-far.general@ametek.co.uk

AMETEK S.A.S. Rond Point de l'Epine des Champs Buro Plus - Bat. D 78990 Elancourt France Tel +33 (0)1 30 68 89 40 Fax +33 (0)1 30 68 89 49 Email general@loyd-instruments.com Germany

AMETEK GmbH Rudolf-Diesel-Strasse 16 D-40670 Meerbusch

Germany Tel +49 (0)2159 9136-70 Fax +49 (0)2159 9136-39 Email info@ametek.de

Singapore

AMETEK Singapore Pvt. Ltd. 10 Ang Mo Kio Street 65 #05-12 Techpoint Singapore 569059 Tel +65-6484-2388 Fax +65-6481-6588 Email aspl@ametek.com.sg

© 2010 by AMETEK, Inc.

Information within this document is subject to change without notice.